



Hubris Hand Dryers

The Professional Range



Components & Materials

Steel one-piece cover chromed satin finish.

Also available in white enamel finish, 1.9 mm thick.


Two distances (15/25cm) IR electronic detection sensor.

Nozzle in chrome plated zamak, 22um thick.

Dimensions : 248 mm x 284 mm x 202 mm.

- Cover fixed to the base by means of two vandal-proof lock screws and lock.
- Base in aluminum, 3 mm thick ,with 4Ø8 mm holes for wall mounting.
- Fire resistant plastic UL 94-VO fan scroll.
- Universal brush motor, 5500 rpm, F class, incorporates a self - resetable safety thermal cut - off at 120 °C.

Technical Specifications

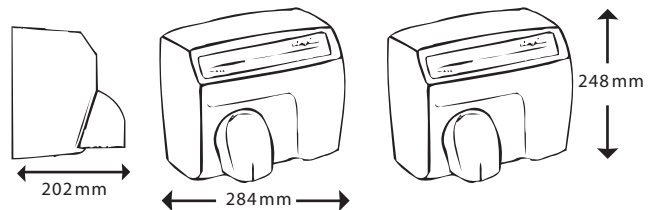

Voltage	220 -240V	Total Power	2500 W
Frequency	50/60 Hz	Motor Power	250 W
Electrical Isolation	Class 1	Heating Element Power	2250 W
Consumption	10A	Protection Level	IP23
Weight	11.5 Kg.	RPM	5500
Effective Airflow	330 m ³ /h/ 5500 l/min	Air temperature (at 10cm distance at 21°C)	53°C
Nominal Airflow	470 m ³ /h/ 7800 l/min	Drying Time	25 sec.
Air Velocity	96 Km/h	Noise Level (at 2m)	70 DB