



**Hand dryer Mediflow basic stainless steel AISI 304 satin finish**
**Código: M03ACS**
**General description**

- Warm air hand dryer.
- Sensor operated.
- Maximum power and airflow.
- Maximum robustness and vandal-proof.
- Suitable for very high traffic facilities.
- Recessed kit that conforms to ADAAG projection also available.
- It normally goes along with a soap dispenser.


**Components and Materials**

- Stainless steel AISI 304 one-piece high quality and high impact cover, satin finish, 1,5 mm thick. Cover fixed to the base by means of 2 vandal-proof lock screws and lock with special Mediflow ® wrench.
- Fire resistant plastic UL 94-V0 base and fan scroll, with 4 Ø 8 mm holes for wall mounting. It includes silent-blocks to damp mechanical vibrations.
- Universal brush motor, 4.500 rpm, F class, includes a self-resetable thermal cut-off at 120 °C.
- Aluminium centrifugal double asymmetrical inlet fan wheel.
- Fe, Al & Cr taped wire heating element mounted on a mica frame that incorporates a self-resetable thermal cut-off at 80 °C.
- Two distances (15/25 cm) IR electronic detection sensor with polycarbonate viewing window.


 272 mm  
(10-3/4")

 325 mm  
(12-7/8")

 164 mm  
(6-1/2")

Dim.: ±4%

**Technical Specifications**

Voltage - 220-240 V	Total power - 2750 W
Frequency - 50/60 Hz	Motor power - 250 W
Electrical isolation - Class II	Heating element power - 2500 W
Dimensions - 325x 272x 164 mm	Consumption - 12 A
Weight - 4,25 Kg	RPM - 4500
Effective airflow - 450 m³/h / 7.500 l/min	Air temperature(10 cm distance / 21 °C) - 49 °C
Nominal airflow - 540 m³/h / 9000 l/min	Noise level (at 2 m) - 65 dB
Air velocity - 95 Km/h	Protection level - IP23

**Operation**

Place the hands under the air outflow valve. The dryer will start automatically, and go on with no interruption as long as the hands are kept in the detection range of the sensor. The appliance will stop 2 seconds after the hands are removed from the airflow.

**Installation**

Please refer to Back

**Certificates & Qualifications**


ISO 9001:2008, CE, AENOR, VDE, GOST. compliant with electrical safety directives 73/23/CEE & 93/68/CEE and electro-magnetic compatibility directives 89/336/CEE & 92/31/CEE. The recessed version complies with ADAAG projection requirements

Mediclinics, S.A., reserves the right to make changes and/or modifications to the products and their specifications without prior notice.

Revision 06-2005

mediclinics S.A



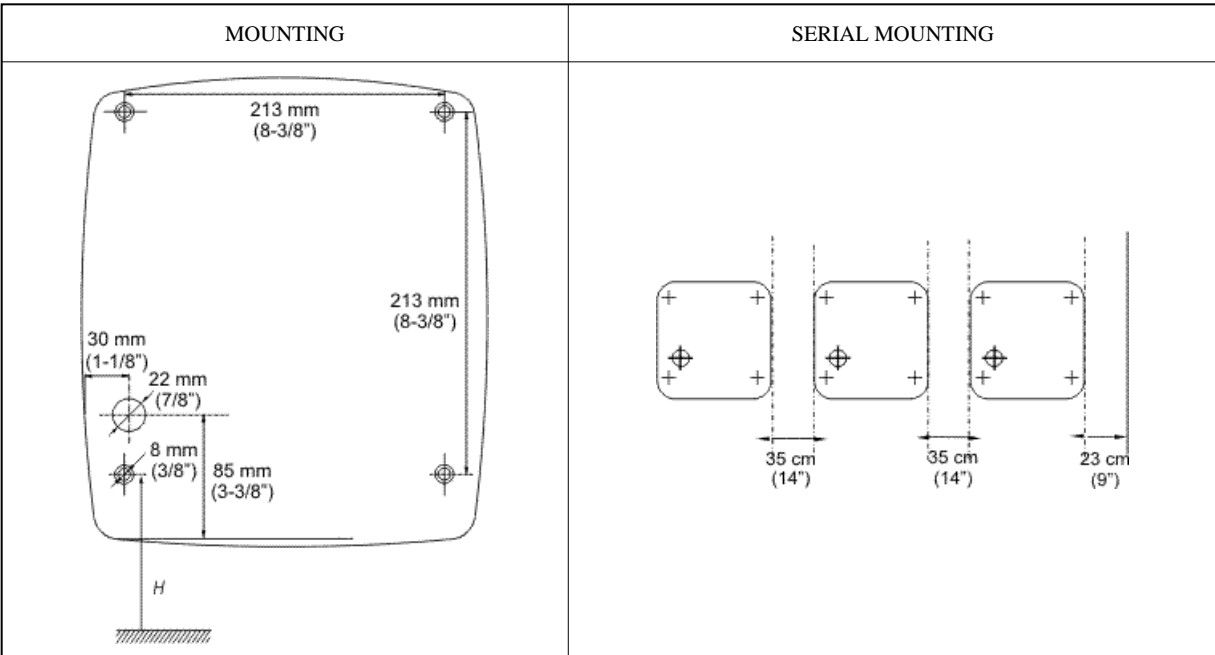


**N° dryers to be fitted:**

- In toilet areas with a normal frequency of use and only one wash-basin: 1 dryer.
- In toilet areas with a normal frequency of use and more than one wash-basin: 1 dryer for each 2 wash-basins.
- 1 row of 4 wash basins: 2 dryers; 1 row of 6 wash basins: 3 dryers; 1 row of 8 wash basins: 4 dryers.
- In toilet areas with high traffic and more than one wash-basin: 2 dryers for each 3 wash-basins.
- 1 row of 4 wash basins: 3 dryers; 1 row of 6 wash basins: 4 dryers; 1 row of 8 wash basins: 5 dryers.

**Ideal Location:**

Between the wash-basin and exit. It is not recommended to install dryer between wash-basins, next to urinals, lavatories and showers. If installing automatic dryers over marble surface or ledge, the minimum distance from the dryer to the ledge must be 400 mm. It is recommended that hand dryers be distributed throughout the washroom area to avoid overcrowding.



**RECOMENDED HEIGHTS  
DISTANCE FROM THE FLOOR**

**Specification**

Surface mounted vandal resistant hand dryer shall be manufactured with one-piece high quality and high impact 1,5 mm thick stainless steel AISI 304 cover, satin finish and fixed to the base by means of 2 vandal-proof lock screws and lock with special Mediflow ® wrench. The back base shall be fire resistant plastic UL 94-V0 and with 4 holes Ø 8 mm for wall mounting, including silent-blocks to damp mechanical vibrations. The dryer shall be activated through an infrared electronic sensor and shall automatically turn off two second after hands are removed. Sensor shall have a polycarbonate viewing window. Universal motor shall be 250 W, 4.500 rpm, class F, including a self-resetable thermal cut-off which will disconnect at 120°C. The Fe, Al & Cr heating element should incorporate a self-resetable thermal cut-off which will disconnect at 80°C. The hand dryer should have an aluminium asymmetrical double inlet fan wheel, and the fan scroll shall be made of a fire resistant plastic UL 94-V0. Dryer shall deliver 450 m<sup>3</sup>/h of air at 49 °C and 95 Km/h velocity during user controlled drying cycle. The dryer shall have a total power of 2.750 Watts with a consumption of 12 A. Noise level should be 65 dB at 2 m distances. Protection level against water splashes should be rating IP23. Overall dimensions shall be 325 x 272 x 164 mm. Unit shall VDE approved and CE marked and comply with electrical safety directives 73/23/CEE& 93/68/CEE and electro-magnetic compatibility directives 89/336/CEE & 92/31/CEE. In recessed version should comply with ADA projection requirements. Surface mounted hand dryer shall be model M03ACS sensor operated stainless steel satin finish, manufactured by Mediclinics S.A., C/ Industria 54, E-08025 Barcelona, Spain.

Mediclinics, S.A., reserves the right to make changes and/or modifications to the products and their specifications without prior notice.

Revision 06-2005

mediclinics S.A

